

Hexaratchets®

Hexaratchets® grip loaded sheets, yet allow sailors to ease and trim quickly and with complete control. A switch on the side engages and disengages the ratchet mechanism.

Ratchets feature Hardkote-anodized, Teflon®-impregnated eight-sided sheaves machined from solid aluminum for strength and corrosion resistance. Free-rolling Delrin® ball bearings, sheave, and sideplates are UV stabilized with carbon black for maximum protection. High-strength stainless steel straps reinforce blocks.

Reverse Ratchets


Use the 043 or 044 reverse ratchets with the 019 and 009 singles or 050 single with becket on spinnaker and jib sheets where ratchets rotate in opposite directions and on/off switches face up.

Hexa-Cat Bases

Combine the 193 and 170 Hexa-Cat bases with Big Bullet or 2.25 in (57 mm) blocks for purchases from 5:1 to 8:1.

Use for:

- Mainsheet systems
- Jib sheets
- Spinnaker sheets
- Vangs
- Furling Lines

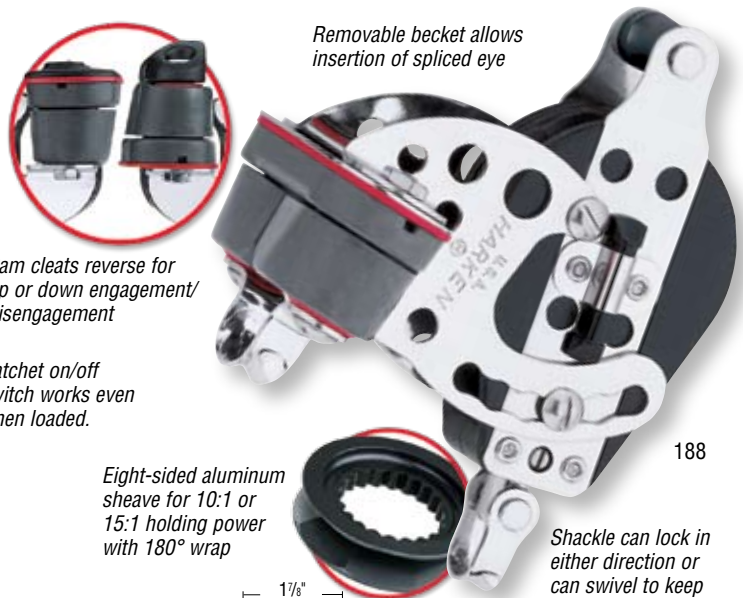


Removable becket allows insertion of spliced eye

Cam cleats reverse for up or down engagement/disengagement

Ratchet on/off switch works even when loaded.

Eight-sided aluminum sheave for 10:1 or 15:1 holding power with 180° wrap

Shackle can lock in either direction or can swivel to keep line from twisting

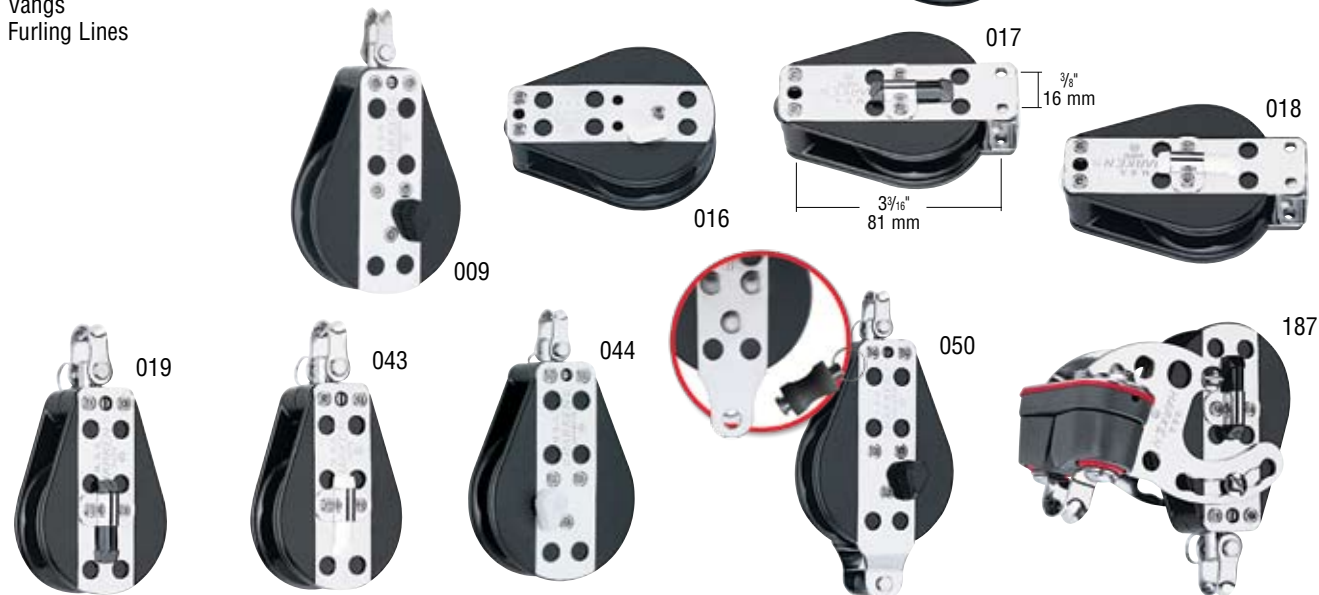

Part No.	Description	Sheave Ø		Length		Weight		Max line Ø		Shackle pin Ø		Maximum working load		Breaking load		Holding power w/180° wrap 50 lb (23 kg)	Turns
		in	mm	in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg		
2.25"																	
017	Cheek (stbd)‡	2 1/4	57	3 3/4	95	4 1/2	128	3/8	10	—	—	500	227	1000	454	10:1	Clockwise
018	Cheek (port)‡	2 1/4	57	3 3/4	95	4 1/2	128	3/8	10	—	—	500	227	1000	454	10:1	Counterclockwise
019	Single	2 1/4	57	4 1/4	108	5	142	3/8	10	3/16	5	500	227	2000	907	10:1	Clockwise
043	Single	2 1/4	57	4 1/4	108	5	142	3/8	10	3/16	5	500	227	2000	907	10:1	Counterclockwise
187	Single/150 Cam-Matic®	2 1/4	57	4 1/4	108	10 1/2	298	3/8	10	3/16	5	500	227	2000	907	10:1	Clockwise
188	Single/150 Cam-Matic®/becket	2 1/4	57	5	127	11	312	3/8	10	3/16	5	500	227	2000	907	10:1	Clockwise
3.00"																	
009	Single	3	76	5	127	8 1/2	241	7/16	12	3/16	5	750	341	2000	907	15:1	Clockwise
015	Cheek (stbd)‡	3	76	4	102	7 1/2	213	7/16	12	—	—	750	341	1500	680	15:1	Clockwise
016	Cheek (port)‡	3	76	4	102	7 1/2	213	7/16	12	—	—	750	341	1500	680	15:1	Counterclockwise
044	Single	3	76	5	127	8 1/2	241	7/16	12	3/16	5	750	341	2000	907	15:1	Counterclockwise
050	Single/becket	3	76	6	152	9	255	7/16	12	3/16	5	750	341	2000	907	15:1	Clockwise

‡Includes #8 (4 mm) RH fasteners and mounting pad