


Hexaratchets®

40^{ème} Semaine Olympique Française de Voile — Linda Wright photo

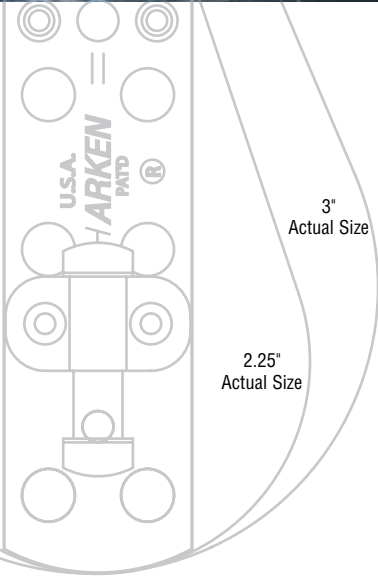

Hexa-Cat maximum working loads

	Base	5:1		6:1		7:1		8:1	
		lb	kg	lb	kg	lb	kg	lb	kg
Little Hexa-Cats	193	1100	499	1100	499	1250	567	1250	567
Hexa-Cats	170	1500	680	1500	680	1500	680	1500	680

Boom blocks (single block on boom)

5:1		6:1		7:1		8:1	
Little Hexa-Cat	Hexa-Cat	Little Hexa-Cat	Hexa-Cat	Little Hexa-Cat	Hexa-Cat	Little Hexa-Cat	Hexa-Cat
128	004/2603/ 2663	129	048/2604 or 2664	130	076/2605 or 2665	2654	2677 2631

Boom blocks (multiple blocks on boom)

126/125	001/002 or 2601/2600 2660/2661	125/127	001/003 or 2602/2600 2662/2660	126/127	002/003 or 2603/2600 2663/2660	2 x 127	2 x 003 or 2 x 2602 2 x 2662
193	170	193	170	193	170	193	170

Part No.	Description	Sheave Ø		Length		Weight		Max line Ø		Shackle pin Ø		Maximum working load		Breaking load		Use with
		in	mm	in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg	
2.25"																
194	Triple/light-duty/swivel/150 Cam-Matic®	2 1/4	57	4 1/2	114	18	510	7/16	12	1/4	6	500	227	2000	907	004 - 5:1/048 - 6:1
397	Double	2 1/4	57	4 1/8	105	10	284	3/8	12	3/16	5	750	341	2500	1134	—
Bases																
170	Hexa-Cat/150 Cam-Matic®	3	76	7 1/4	184	16 1/2	468	7/16	12	1/4	6	—	—	3000	1361	—
193	Little Hexa-Cat/150 Cam-Matic®	2 1/4	57	5 3/4	146	12	340	3/8	10	1/4	6	—	—	2500	1134	—