

Line/Wire High Strength

Lightweight, low-friction wire blocks carry wire halyards and high-strength control lines on boats of all sizes.

High-load composite bearings carry axial loads. Hardkote-anodized Teflon® impregnated sheave for strength and corrosion resistance.

25 mm (1.00 in) wire blocks use low-friction thrust washers. 38 mm (1.50 in) and 51 mm (2.00 in) wire blocks feature sideload balls between the sheave and the sideplate to minimize friction from unfair leads.

466 Features a forkhead and becket making it useful for vang, halyards and control lines.

Use for:

- Wire halyards
- Vangs
- Control lines


Narrow forkhead to create snug fit on tang and to allow for minimal friction

High load composite bearings handle wire and high-strength line

Sideplates rotate to insert pre-swaged/Nico pressed wire fittings



Rocket 22, Sylvana Yachts — Ivan Ivandic photo

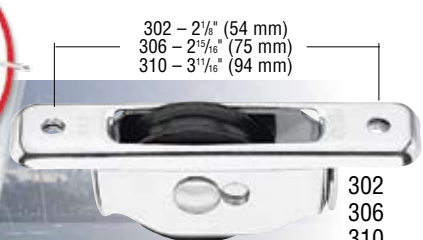

Cutout
 302 13/32" (11 mm) x 1 17/32" (39 mm)
 306 17/32" (13 mm) x 2 5/16" (59 mm)
 310 9/16" (14 mm) x 2 29/32" (73 mm)



302
306
310



300
304
308



312
313
314



320

Part No.	Description	Sheave Ø		Weight		Max wire Ø		Max line Ø		Shackle pin Ø		Maximum working load		Breaking load	
		in	mm	oz	g	in	mm	in	mm	in	mm	lb	kg	lb	kg
300	Single	1	25	1	28	3/32	2	5/32	4	3/16	5	1000	454	2000	907
301	Cheek†*	1	25	1.25	35	3/32	2	5/32	4	—	—	1000	454	2000	907
302	Thru-deck*	1	25	1	28	3/32	2	5/32	4	—	—	1000	454	2000	907
304	Single	1 1/2	38	2.75	78	1/8	3	3/16	5	1/4	6	1500	680	3000	1361
305	Cheek†**	1 1/2	38	3.25	92	1/8	3	3/16	5	—	—	1500	680	3000	1361
306	Thru-deck*	1 1/2	38	3.25	92	1/8	3	3/16	5	—	—	1500	680	3000	1361
308	Single	2	51	5.25	149	3/16	5	1/4	6	5/16	8	2000	907	4000	1814
309	Cheek†***	2	51	6	170	3/16	5	1/4	6	—	—	2000	907	4000	1814
310	Thru-deck**	2	51	5.75	163	3/16	5	1/4	6	—	—	2000	907	4000	1814
312	Single/becket	1	25	1.25	35	3/32	2	5/32	4	3/16	5	1000	454	2000	907
313	Single/becket	1 1/2	38	3	85	1/8	3	3/16	5	1/4	6	1500	680	3000	1361
314	Single/becket	2	51	5.75	163	3/16	5	1/4	6	5/16	8	2000	907	4000	1814
320	Ferrule head	1 1/2	38	3	85	1/8	3	3/16	5	—	—	1500	680	3000	1361
321	Small split backstay plate for 304	—	—	1	28	—	—	—	—	—	—	—	—	—	—
322	Split backstay plate for 308	—	—	1.19	34	—	—	—	—	—	—	—	—	—	—
466	Single forkhead/becket	1	25	1.02	29	3/32	2	5/32	4	3/16	5	1000	454	2000	907

†Fasteners included *#10 (5 mm) RH fasteners **1/4" (6 mm) RH fasteners ***5/16" (8 mm) RH fasteners