

Ball Bearing Cam Cleats

NEW: 468, 471




468 and 471: available January 2009

Part No.	Description	Height		Length		Width		Weight		Line Ø min - max		Fastener spacing		Maximum working load		Breaking load		Pawls
		in	mm	in	mm	in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg	
150	Cam-Matic®*	1 ³ / ₁₆	30	2 ⁹ / ₁₆	65	1 ¹ / ₄	32	2.50	71	1/8 - 1/2	3 - 12	1 ¹ / ₂	38	300	136	750	340	Aluminum
280	Offshore Cam-Matic®****	1 ¹ / ₄	32	3 ³ / ₈	85	1 ¹ / ₂	38	5.25	148	1/4 - 5/8	6 - 16	2 ¹ / ₁₆	52	500	227	1000	454	Aluminum
468	Micro Cam-Matic®**	7/8	22	1 ⁷ / ₈	48	1 ⁵ / ₁₆	24	0.93	26	3/32 - 1/4	2 - 6	1 ¹ / ₁₆	27	200	91	400	181	Aluminum
365	Carbo-Cam®*	1 ³ / ₃₂	28	2 ⁹ / ₁₆	65	1 ¹ / ₄	32	1.44	42	1/8 - 3/8	3 - 10	1 ¹ / ₂	38	200	91	500	227	Plastic carbon-matrix
412	Double Cam-Matic®****	2 ¹ / ₁₆	53	3 ⁷ / ₃₂	81	1 ¹ / ₄	32	4.50	126	5/16 - 3/8	8 - 10	2 ¹ / ₁₆	62	500	227	750	340	Aluminum
471	Micro Carbo-Cam®**	7/8	22	1 ⁷ / ₈	48	1 ⁵ / ₁₆	24	0.67	19	1/8 - 1/4	3 - 6	1 ¹ / ₁₆	27	150	68	300	136	Plastic carbon-matrix

*#10 (5 mm) FH fasteners **#8 (4 mm) RH fasteners ***1/4" (6 mm) FH fasteners ****#10 (5 mm) TH fasteners

Cam Kits

NEW: 472, 473, 474, 469, 470

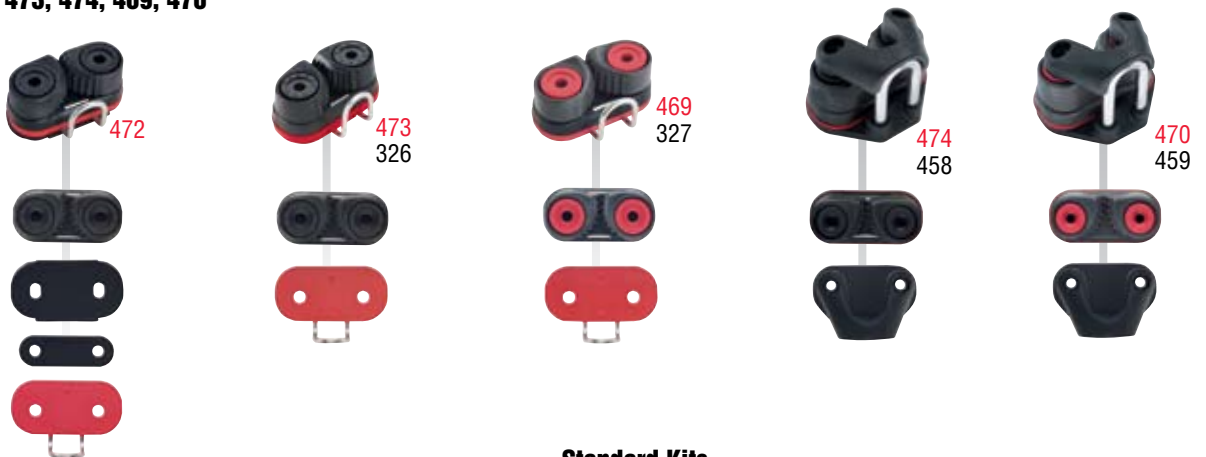

Micro Kits

469, 470, 472, 473, 474: available January 2009

Standard Kits

Part No.	Description	Cam	Wedge	Fairlead	Weight		Part No.	Description	Cam	Wedge	Fairlead	Weight	
					oz	g						oz	g
472	Carbo-Cam®/wedge/wire fairlead	471	297	475	1.2	33	326	Carbo-Cam®/wire fairlead	365	—	298	2.00	54
469	Cam-Matic®/wire fairlead	468	—	475	1.2	33	327	Cam-Matic®/wire fairlead	150	—	298	3.00	85
473	Carbo-Cam®/wire fairlead	471	—	475	0.9	26	458	Carbo-Cam®/X-Treme Angle Fairlead	365	—	380	2.00	54
474	Carbo-Cam®/X-Treme Angle Fairlead	471	—	476	1.7	47	459	Cam-Matic®/X-Treme Angle Fairlead	150	—	375	2.06	58
470	Cam-Matic®/X-Treme Angle Fairlead	468	—	476	1.9	55							