

# Cruising ESP Deck Organizers

**NEW: 6102, 6103, 6104**

Deck organizers lead halyards and control lines aft, allowing crew to sail from the security of the cockpit. They lead a large number of lines through a small space. Harken® deck organizers feature ball bearing sheaves and are available in double, triple, and stacked double and triple configurations.

The ESP Deck Organizer features aluminum Hardkote-anodized side plates for strength and corrosion resistance.

Mount organizers with large fasteners directly through the sheaves. If you need an additional sheave, use the same holes and simply drill another hole to mount the longer organizer.

Match Cruising ESP mastbase blocks with organizers for a complete system.


6102 is pre-assembled as a double and shares a common center plate.

Full-saturation, Hardkote anodizing for durability

Excellent for halyards

Aluminum and plastic sleeve bearing for high static loads

Ball bearings handle loads from unfair leads keeping the sheave turning freely

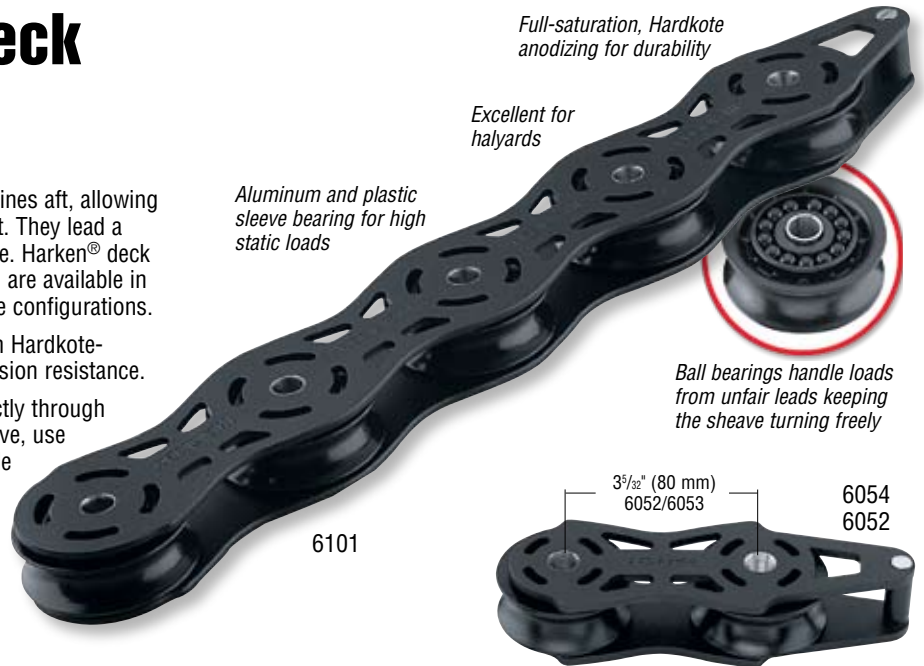

6101




6054  
6052



6055  
6056

6075 Available in 6071 stainless steel

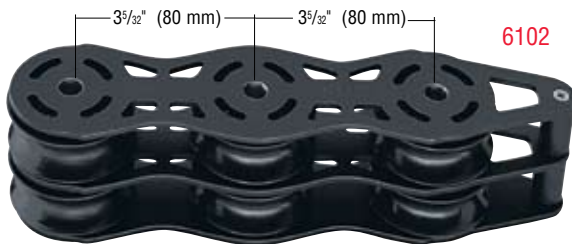

6102



6066  
6067



2 1/4" (57 mm)  
6103

3 5/32" (80 mm)  
6104

6103  
6104

Part No.	Description	Sheave Ø		Length		Weight		Height		Max line Ø	Maximum working load/sheave		Maximum working load*		Breaking load*		Fasteners (RH)	
		in	mm	in	mm	oz	g	in	mm		in	mm	lb	kg	lb	kg		
6052	Aluminum 2-sheave	2 1/4	57	6 3/4	172	7.5	213	1 1/16	27	5/8	16	2500	1134	4000	1814	8000	3628	3/8 10
6053	Aluminum 3-sheave	2 1/4	57	9 15/16	252	11.5	326	1 1/16	27	5/8	16	2500	1134	6000	2721	12000	5442	3/8 10
6054	Aluminum 2-sheave	1 9/16	40	4 13/16	122	3.5	99	15/16	24	1/2	12	1250	567	2000	907	4000	1814	5/16 8
6055	Aluminum 3-sheave	1 9/16	40	7 11/16	179	5.5	156	15/16	24	1/2	12	1250	567	3000	1361	6000	2721	5/16 8
6066	Aluminum 4-sheave	1 9/16	40	9 5/16	237	7.5	213	15/16	24	1/2	12	1250	567	4000	1814	8000	3628	5/16 8
6067	Aluminum 4-sheave	2 1/4	57	13 1/16	332	15.5	439	1 1/16	27	5/8	16	2500	1134	8000	3628	16000	7256	3/8 10
6071	Stainless Steel 3-sheave	2 1/4	57	9 15/16	252	21	595	—	—	5/8	16	2500	1134	6000	2721	12000	5442	3/8 10
6075	Stainless Steel 3-sheave	1 9/16	40	7 11/16	179	10	284	—	—	1/2	12	1250	567	3000	1361	6000	2721	5/16 8
6101	Aluminum 5-sheave	2 1/4	57	16 7/32	412	18.4	522	—	—	5/8	16	2500	1134	10000	4535	20000	9070	3/8 10
6102	Aluminum 6-sheave	2 1/4	57	9 15/16	252	20.7	588	2 1/32	52	5/8	16	2500	1134	6000	2721	12000	5442	3/8 10
6103	Aluminum 6-sheave	1 9/16	40	13 3/4	348	11.5	326	15/16	24	1/2	12	1250	567	6000	2721	12000	5442	5/16 8
6104	Aluminum 6-sheave	2 1/4	57	19 5/16	490	21.3	604	1 1/16	27	5/8	16	2500	1134	12000	5442	24000	10884	3/8 10

DO NOT use Harken equipment for human suspension. \*If double stacked, upper block/organizer is two-thirds of listed MWL and breaking load