


Eyestraps

Eyestraps are useful accessories. They form light-duty mounting bases for blocks, serve as lash-down points, and can be used for fairleads.

Forged eyestraps are extremely strong and their smooth shape won't chafe line.

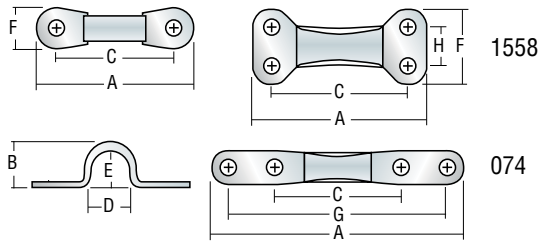

Part No.	Weight oz g	Fasteners (RH)		A		B		C		D		E		F		G		H		Fits		Breaking load	
		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	cam	lb	kg	
073	.16 4.5	#10	5	1 ¹¹ / ₁₆	43	1/2	12	1 ¹ / ₄	32	7 ⁷ / ₁₆	11	3/8	10	7 ⁷ / ₁₆	11	—	—	—	—	—	—	1600	726
074	.64 18	1/4"	6	3 ¹ / ₄	83	3/4	19	1 ¹ / ₂	38	5/8	16	5/8	16	9/16	14	2 ³ / ₄	70	—	—	—	—	4000	1814
137	.32 9	1/4"	6	2	51	3/4	19	1 ¹ / ₂	38	5/8	16	5/8	16	9/16	14	—	—	—	—	—	150/365	3000 1361	
201	.16 4.5	#10	5	1 ⁷ / ₈	48	3/8	10	1 ¹ / ₂	38	9/16	14	1/4	6	7/16	11	—	—	—	—	—	150/365	1600 726	
281	.16 4.5	#8	4	1 ⁷ / ₁₆	36	1/2	12	1 ¹ / ₁₆	27	7/16	11	3/8	10	7/16	11	—	—	—	—	—	338/423	1000 454	
282	.8 23	1/4"	6	2 ¹³ / ₁₆	71	15/16	23	2 ¹ / ₁₆	52	7/8	22	3/4	19	3/4	19	—	—	—	—	—	280	3000 1361	
419	.5 14	#10	5	2 ¹ / ₂	64	3/4	19	2	51	3/4	19	5/8	16	1/2	12	—	—	—	—	—	418	1600 726	
445	.09 2.5	#8	4	1 ¹ / ₂	38	3/8	10	1 ¹ / ₁₆	27	7/16	11	3/8	10	7/16	11	—	—	—	—	—	—	1000 454	
1558	1 28	1/4"	6	2 ¹ / ₄	57	5/8	16	1 ³ / ₄	45	5/8	16	7/16	11	1 ¹ / ₈	29	—	—	5/8	16	—	—	6000 2722	
2129	.35 10	#10	5	2 ¹ / ₁₆	53	9/16	14.5	1 ¹¹ / ₁₆	43	1/2	13	3/8	10	3/8	10	—	—	—	—	—	—	2500 1130	
2130	.57 14	1/4"	6	2 ¹ / ₁₆	59	3/4	19	1 ⁷ / ₈	47	5/8	16	1/2	12	1/2	12	—	—	—	—	—	—	3500 1588	

DO NOT use Harken equipment for human suspension.

Padeyes

Padeyes are great for mounting blocks and are also used as attachment points for staysails, reefing blocks, and hundreds of other items.

Harken® offers a range of stainless steel padeyes. The diamond-shaped padeyes, 688 and 689, are 316 stainless and often used at mastbases where the diamond shape allows them to be mounted very close together. The 627, 629, and 648 padeyes are 17-4 PH stainless.

For maximum strength always align padeye bails to the load.



Part No.	Maximum working load						Breaking load						Fasteners (FH)	
	1 lb	2 kg	3 lb	4 kg	5 lb	7 kg	1 lb	2 kg	3 lb	4 kg	5 lb	7 kg	in	mm
627	5000	2270	4500	2040	4300	1950	10000	4535	9000	4080	8600	3900	1/4	6
629	20000	9070	12000	5440	14000	6350	40000	18140	24000	10890	28000	12700	1/2	12
648	11800	5358	10375	4705	8500	3855	23600	10716	20750	9430	17000	7710	3/8	10
688	3800	1770	5000	2270	4300	1950	7800	3540	10000	4535	8600	3900	1/4	6
689	8500	3855	8000	3628	7800	3540	19000	8618	17200	7800	15600	7075	5/16	8

Part No.	Description	A		B		C		D		E		F		G		Weight	
		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	oz	g
627	Small round	2 ¹ / ₄	57	—	—	1 ¹ / ₁₆	27	1 ³ / ₁₆	30	1 ³ / ₁₆	30	5/8	16	1 ⁵ / ₁₆	24	4 ¹ / ₄	118
629	Large round	3 ³ / ₄	95	—	—	1 ³ / ₄	44	1 ⁷ / ₈	48	2	51	1 ¹ / ₁₆	27	1 ³ / ₄	44	23	652
648	High-load medium	3	76	—	—	1 ⁵ / ₁₆	33	1 ⁹ / ₁₆	40	1 ¹⁵ / ₁₆	50	1 ¹ / ₈	29	1 ⁷ / ₁₆	37	11	312
688	Small diamond	3/8	79	2	51	2 ³ / ₈	60	1 ¹ / ₄	32	1 ¹ / ₁₆	30	9/16	14	7/8	22	43/4	135
689	Large diamond	3/8	98	2 ¹ / ₁₆	59	2 ¹ / ₈	73	1 ³ / ₈	35	1 ⁹ / ₁₆	40	7/8	22	1 ¹ / ₁₆	27	7 ¹ / ₂	213

DO NOT use Harken equipment for human suspension.