

Small Boat CB Track & Accessories

Small boat track comes in low or high-beam configurations. Use low-beam track when it's supported at each fastener hole. Use high-beam track when it must span a cockpit or other unsupported area. Choose between variable hole spacing and drilled track. Sold in pairs. Fasteners not included.

Endstops and Trim Caps




Use 173 and 174 endstops for small dinghies and low-load situations. The 446 line-shedding endstop is low-profile and snag-free. The 263 and 264 heavy duty endstops absorb the shock loads of unintentional jibes and are used on larger dinghies and small keelboats. Use 2722 and 2723 trim caps to finish track ends when using control block assemblies. Sold in pairs. Fasteners not included.

Splice Links

Splice links join track and keep it aligned during installation.

Curved Track

Harken® will bend track to your specifications. See page 102.

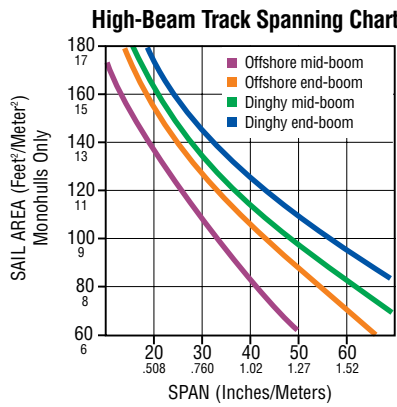

Fastener Hole Distance from Track End			
Metric		Retrofit	
in	mm	in	m
1 ¹⁵ / ₁₆	50	2	51

Track Bending		
Minimum radius		
Car	in	m
2726 - 2734	42	1.07
2735 - 2738	80	2.03

Part No.	Description	Length ft/in	Length m	Hole spacing in	Hole spacing mm	Weight oz	Weight g	Fasteners in	Fasteners mm	Endstop*‡/trim cap‡	Splice link/line-shedding endstop‡
Metric Track											
2720.600mm	Low-beam	1'11 ⁵ / ₈ "	0.6	3 ⁵ / ₁₆	100	9.1	258	10FH	5FH	173, 263/2722	2724/446**
2720.1m	Low-beam	3'3 ³ / ₈ "	1	3 ⁵ / ₁₆	100	15.2	430	10FH	5FH	173, 263/2722	2724/446**
2720.1.2m	Low-beam	3'11 ¹ / ₄ "	1.2	3 ⁵ / ₁₆	100	18.2	516	10FH	5FH	173, 263/2722	2724/446**
2720.1.5m	Low-beam	4'11 ¹ / ₁₆ "	1.5	3 ⁵ / ₁₆	100	22.8	645	10FH	5FH	173, 263/2722	2724/446**
2720.1.8m	Low-beam	5'10 ³ / ₁₆ "	1.8	3 ⁵ / ₁₆	100	27.3	775	10FH	5FH	173, 263/2722	2724/446**
2720.2.1m	Low-beam	6'10 ¹ / ₁₆ "	2.1	3 ⁵ / ₁₆	100	31.9	904	10FH	5FH	173, 263/2722	2724/446**
2720.2.5m	Low-beam	8'2 ¹ / ₁₆ "	2.5	3 ⁵ / ₁₆	100	38	1077	10FH	5FH	173, 263/2722	2724/446**
2720.3m	Low-beam	9'10 ¹ / ₁₆ "	3	3 ⁵ / ₁₆	100	45.5	1291	10FH	5FH	173, 263/2722	2724/446**
2720.3.6m	Low-beam	11'9 ³ / ₄ "	3.6	3 ⁵ / ₁₆	100	54.6	1549	10FH	5FH	173, 263/2722	2724/446**
2720.6m	Low-beam	19'8 ¹ / ₄ "	6	3 ⁵ / ₁₆	100	91.1	2582	10FH	5FH	173, 263/2722	2724/446**
2725.1m	High-beam	3'3 ³ / ₈ "	1	3 ⁵ / ₁₆	100	21	586	10FH	5FH	174, 264/2723	—
2725.1.2m	High-beam	3'11 ¹ / ₄ "	1.2	3 ⁵ / ₁₆	100	24.5	695	10FH	5FH	174, 264/2723	—
2725.1.5m	High-beam	4'11 ¹ / ₁₆ "	1.5	3 ⁵ / ₁₆	100	31	879	10FH	5FH	174, 264/2723	—
2725.1.8m	High-beam	5'10 ³ / ₁₆ "	1.8	3 ⁵ / ₁₆	100	37	1055	10FH	5FH	174, 264/2723	—
2725.3.6m	High-beam	11'9 ³ / ₄ "	3.6	3 ⁵ / ₁₆	100	74	2110	10FH	5FH	174, 264/2723	—
Variable Hole Spacing Track											
2721.1m	High-beam	3'3 ³ / ₈ "	1	Slide bolt	25	709	—	5HH	—	174, 264/2723	—
2721.1.2m	High-beam	3'11 ¹ / ₄ "	1.2	Slide bolt	30	851	—	5HH	—	174, 264/2723	—
2721.1.5m	High-beam	4'11 ¹ / ₁₆ "	1.5	Slide bolt	37.5	1064	—	5HH	—	174, 264/2723	—
2721.1.8m	High-beam	5'10 ³ / ₁₆ "	1.8	Slide bolt	45	1277	—	5HH	—	174, 264/2723	—
2721.3.6m	High-beam	11'9 ³ / ₄ "	3.6	Slide bolt	90.1	2554	—	5HH	—	174, 264/2723	—
Retrofit 4" Hole Spacing Track											
373.6	Low-beam	6	1.83	4	102	28	787	10FH	5FH	173, 263/2722	2724/446**
373.12	Low-beam	12	3.66	4	102	56	1574	10FH	5FH	173, 263/2722	2724/446**
374.4	High-beam	4	1.22	4	102	25	709	10FH	5FH	174, 264/2723	—
374.6	High-beam	6	1.83	4	102	38	1077	10FH	5FH	174, 264/2723	—
374.12	High-beam	12	3.66	4	102	76	2143	10FH	5FH	174, 264/2723	—



Actual size track chart available at www.harken.com *#10 (5 mm) FH fasteners ‡Sold in pairs **Fastens directly to deck