

# Big Boat CB Track & Accessories

Big Boat track comes in low- or high-beam configurations. Use low-beam track when it's supported at each fastener hole. Use high-beam track when it must span a cockpit or other unsupported area. Choose between variable hole spacing and drilled track.

## Pinstop Track

3155 track has 7/16 in (12 mm) pinstop holes spaced on 1 5/16 in (34 mm) centers to accept 3124 and 3125 pinstop cars.

## Endstops/Trim Caps

When end controls are not used, add 548 or 562 endstops to absorb shock loads. When end controls assemblies are used, trim caps finish track ends. Sold in pairs. Fasteners not included.


## Splice Links

Splice links join track and keep it aligned during installation.



## Curved Track

Harken® will bend track to your specifications. See page 102.

## High-Beam Slide Bolt Track Spanning Chart

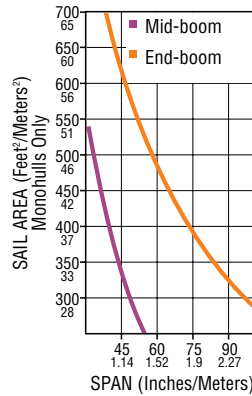


Use track risers to clear companionway hatches. See page 115



Track Bending		
Traveler car	Minimum radius	
	ft	m
3163/3164/3176/3177	8	2.44
3165/3166/3178/3179	18	5.49
2 x 3163	8	2.44
3167	24	7.32

Part No.	Description	Length		Mounting hole spacing		Weight		Fasteners		Endstop#/trim cap‡	Splice link/track riser‡
		ft/in	m	in	mm	oz	kg	in	mm		
<b>Metric Track</b>											
3154.1.2m	Low-beam	3'11 1/4"	1.2	3 1/16	100**	43	1.22	5/16FH	8FH	548/3157	3153/—
3154.1.5m	Low-beam	4'11 1/16"	1.5	3 1/16	100**	54	1.52	5/16FH	8FH	548/3157	3153/—
3154.1.8m	Low-beam	5'10 7/8"	1.8	3 1/16	100**	65	1.83	5/16FH	8FH	548/3157	3153/—
3154.2.1m	Low-beam	6'10 1/16"	2.1	3 1/16	100**	75	2.13	5/16FH	8FH	548/3157	3153/—
3154.2.4m	Low-beam	7'10 1/2"	2.4	3 1/16	100**	86	2.44	5/16FH	8FH	548/3157	3153/—
3154.3m	Low-beam	9'10 3/8"	3	3 1/16	100**	107	3.04	5/16FH	8FH	548/3157	3153/—
3154.3.6m	Low-beam	11'9 3/4"	3.6	3 1/16	100**	129	3.65	5/16FH	8FH	548/3157	3153/—
3154.6m	Low-beam	19'8 3/4"	6	3 1/16	100**	215	6.09	5/16FH	8FH	548/3157	3153/—
3155.1.2m	Low-beam/pinstop holes	3'11 1/4"	1.2	3 1/16	100**	41	1.15	5/16FH	8FH	548/3157	3153/—
3155.1.5m	Low-beam/pinstop holes	4'11 1/16"	1.5	3 1/16	100**	51	1.44	5/16FH	8FH	548/3157	3153/—
3155.1.8m	Low-beam/pinstop holes	5'10 7/8"	1.8	3 1/16	100**	61	1.73	5/16FH	8FH	548/3157	3153/—
3155.2.1m	Low-beam/pinstop holes	6'10 1/16"	2.1	3 1/16	100**	71	2.01	5/16FH	8FH	548/3157	3153/—
3155.2.4m	Low-beam/pinstop holes	7'10 1/2"	2.4	3 1/16	100**	81	2.3	5/16FH	8FH	548/3157	3153/—
3155.3m	Low-beam/pinstop holes	9'10 3/8"	3	3 1/16	100**	101	2.86	5/16FH	8FH	548/3157	3153/—
3155.3.6m	Low-beam/pinstop holes	11'9 3/4"	3.6	3 1/16	100**	122	3.45	5/16FH	8FH	548/3157	3153/—
3155.6m	Low-beam/pinstop holes	19'8 3/4"	6	3 1/16	100**	203	5.74	5/16FH	8FH	548/3157	3153/—
3162.1.5m	Air Track®	4'11 1/16"	1.5	3 1/16	100**	45	1.29	5/16FH	8FH	548/3157	3153/—
3162.2.4m	Air Track®	7'10 1/2"	2.4	3 1/16	100**	73	2.06	5/16FH	8FH	548/3157	3153/—
3162.3.6m	Air Track®	11'9 3/4"	3.6	3 1/16	100**	109	3.1	5/16FH	8FH	548/3157	3153/—
3162.6m	Air Track®	19'8 3/4"	6	3 1/16	100**	182	5.16	5/16FH	8FH	548/3157	3153/—
<b>Variable Hole Spacing Track</b>											
3156.1.2m	High-beam	3'11 1/4"	1.2		Slide bolt	134	3.79	5/16HH	8HH	562/3158	—/1849‡‡
3156.1.5m	High-beam	4'11 1/16"	1.5		Slide bolt	167	4.74	5/16HH	8HH	562/3158	—/1849‡‡
3156.1.8m	High-beam	5'10 7/8"	1.8		Slide bolt	201	5.69	5/16HH	8HH	562/3158	—/1849‡‡
3156.2.1m	High-beam	6'10 1/16"	2.1		Slide bolt	234	6.64	5/16HH	8HH	562/3158	—/1849‡‡
3156.2.4m	High-beam	7'10 1/2"	2.4		Slide bolt	268	7.59	5/16HH	8HH	562/3158	—/1849‡‡
3156.3.6m	High-beam	11'9 3/4"	3.6		Slide bolt	402	11.38	5/16HH	8HH	562/3158	—/1849‡‡
<b>Retrofit 4" Hole Spacing Track</b>											
3159.6	Low-beam	6	1.83	4	102**	66	1.86	5/16FH	8FH	548/3157	3153/—
3159.8	Low-beam	8	2.44	4	102**	89	2.48	5/16FH	8FH	548/3157	3153/—
3159.12	Low-beam	12	3.66	4	102**	131	3.71	5/16FH	8FH	548/3157	3153/—



Actual size track chart available at [www.harken.com](http://www.harken.com) \*\*1st hole 50 mm (2") ‡Sold in pairs ‡‡Track riser 1849 shown on page 115