

System AA

NEW: 3837

Track

Track is extruded from high-grade 6061-T6 aluminum and Hardkote-anodized for a hard, long-lasting surface. 3817 track mounts to mast using a unique slug system that allows mast-up installation.

For masts without internal sail track, attach 2707 Micro traveler track by drilling and tapping the spar. Join track sections with splice links. Order one per track joint. Order one low-beam endstop (sold in pairs). See chart below.






Mast Track: Slug Mount

Part No.	Description	Length		Weight		Fastener spacing		Fastening method
		in	m	oz/ft	g/m	in	mm	
3817	Slug-mount track	80 ³ / ₄	2.05	2.84	264	3 ¹⁵ / ₁₆	100	Mounting slugs

Traveler Track: Drill/Tap

Part No.	Description	Splice link	Endstop	Ordering information	Fastening method

Mainsail luff length		Number of track sections
ft	m	
20'10" - 27'6"	6.35 - 8.38	4
27'7" - 34'3"	8.41 - 10.44	5
34'4" - 40'11"	10.47 - 12.47	6
41'0" - 47'8"	12.50 - 14.53	7

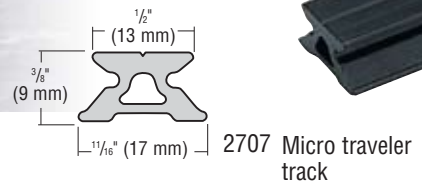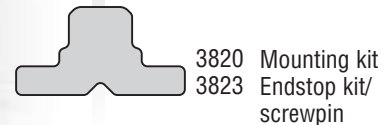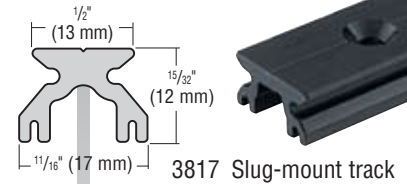

Salona 37, J & J Design, AD Boats

Mounting Kits and Endstops

Mounting kit slugs are available for flat or round mast grooves. Order one kit per track section.

Use screwpin endstop to easily remove cars and mainsail. Order one kit.



Track Mounting Kits: Slug Mount*

Part No.	Description	Mounting slug				Mounting slugs/kit	Connector slug				Fits flat mast groove gap				
		Length	Length	Weight	Weight		Length	Length	Weight	Weight	Connector	Connector	Min	Max	
		in	mm	oz	g	in	mm	oz	g	slugs/kit	slugs/kit	in	mm	in	mm
3818	Round mast groove	3/4	19	.14	4	19	2 ⁵ / ₈	67	.54	15	1	—	—	—	—
3819	Flat mast groove	3/4	19	.17	5	19	2 ⁵ / ₈	67	.60	17	1	5/16	8	7/16	11
3820	Wide flat mast groove	3/4	19	.25	6	19	2 ⁵ / ₈	67	.94	23	1	7/16	11	1/2	13

Endstop Kits: Slug Mount & Drill/Tap*

Part No.	Description	Track end length		Weight		Mounting slugs/kit
		in	mm	oz	g	
3821	Round mast groove/screwpin	6	152	2.4	70	2
3822	Flat mast groove/screwpin	6	152	2.4	70	2
3823	Wide flat mast groove/screwpin	6	152	2.4	70	2
3837	Micro track/screwpin	6	152	2.2	62	—

*Includes M4 x .7 x 20 or 25 mm fasteners