

MKIV Unit 0 Typical Boat Length 22' - 30' (6.5 - 9.1 m)

Wire Ø (1 x 19 SS)	Rod Ø	Clevis Pin Ø
$\frac{3}{16}$ ", $\frac{7}{32}$ " (5, 6 mm)	-4, -6 (4.37, 5.03 mm)	$\frac{3}{8}$ ", $\frac{7}{16}$ " (9.5, 11.1 mm)

Headstay Length Standard 38'7" (11.77 m); max 45'7" (13.9 m)

Part No.	Description
7410.10	Furling system

Toggle Assembly Required - sold separately

7410.20 3/8	Eye/Jaw reversible toggle assembly with $\frac{3}{8}$ " (9.5 mm) clevis pin
7410.20 7/16	Eye/Jaw reversible toggle assembly with $\frac{7}{16}$ " (11.1 mm) clevis pin

Optional Parts

7410.30	Extra 7' (2.13 m) luff foil extrusion
7410.31	Extra $6\frac{1}{2}$ " (165 mm) connector with bushings
7420 -4	-4 Rod adaptor stud (thread Ø UNF $\frac{7}{16}$ "*)
7421 -6	-6 Rod adaptor stud (thread Ø UNF $\frac{7}{16}$ "*)

*Use with conventional turnbuckle

7410.30
7411.30




7410.31
7411.31

7420 -4
7421 -6
7422 -8
7423 -10
7424 -12



7410.20 3/8
7410.20 7/16
7411.20 1/2

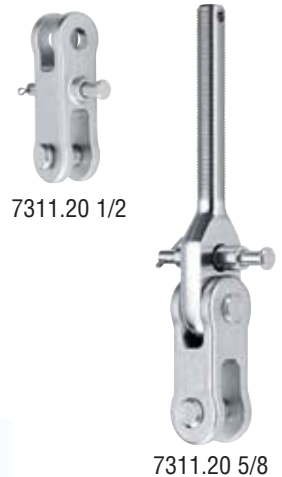

7311.20 1/2

7311.20 5/8

MKIV Unit 1 Typical Boat Length 28' - 36' (8.3 - 11 m)

Wire Ø (1 x 19 SS)	Rod Ø	Clevis Pin Ø
$\frac{1}{2}$ ", $\frac{3}{32}$ ", $\frac{3}{16}$ " (6, 7, 8 mm)	-8, -10, -12 (5.72, 6.35, 7.14 mm)	$\frac{1}{2}$ ", $\frac{5}{8}$ " (12.7, 15.9 mm)

Headstay Length Standard 45'11" (13.99 m); max 52'11" (16.12 m)

Part No.	Description
7411.10	Furling system

Toggle Assembly Required - sold separately

7411.20 1/2	Eye/Jaw reversible toggle assembly with $\frac{1}{2}$ " (12.7 mm) clevis pin
7311.20 1/2	Jaw/Jaw toggle assembly with $\frac{1}{2}$ " (12.7 mm) clevis pin
7311.20 5/8	Stud/Jaw toggle assembly with $\frac{5}{8}$ " (15.9 mm) clevis pin (thread Ø UNF $\frac{5}{8}$ " LH)
7311.21 1/2	Long link plate with toggle assembly with $\frac{1}{2}$ " (12.7 mm) clevis pin
7311.21 5/8	Long link plate with toggle assembly with $\frac{5}{8}$ " (15.9 mm) clevis pin

Optional Parts

7411.30	Extra 7' (2.13 m) luff foil extrusion
7411.31	Extra 7" (178 mm) connector with bushings
7422 -8	-8 Rod adaptor stud (thread Ø UNF $\frac{1}{2}$ "*)
7423 -10	-10 Rod adaptor stud (thread Ø UNF $\frac{1}{2}$ "*)
7424 -12	-12 Rod adaptor stud (thread Ø UNF $\frac{5}{8}$ "*)

*Use with conventional turnbuckle



7311.21 1/2
7311.21 5/8



Outward Bound 46 — Swiftsure Yachts Seattle photo