


Standard & Grand Prix Racing



Mylius 14E55, Alberto Simeone, Mylius S.r.l. — Mario Sassi photo

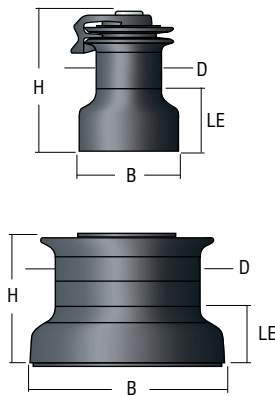

Part No.	Gear ratio			Power ratio			Fastener circle		Fasteners	
	1	2	3	1	2	3	in	mm	in	mm
B45.2STR	2.5:1	8.2:1	—	13.8:1	44:1	—	5 ¹ / ₃₂	128	5 x 7 ¹⁶ / ₁₆ HH	5 x 8 HH
B480TCR	1:1	2.5:1	10:1	4.2:1	10.8:1	43:1	6 ¹ / ₈	155	6 x 7 ¹⁶ / ₁₆ HH	6 x 8 HH
B50.2STR	2.7:1	11.4:1	—	11.7:1	50.7:1	—	6 ¹⁵ / ₃₂	164	6 x 7 ¹⁶ / ₁₆ FH	6 x 8 FH
B50.3STR	1:1	2.7:1	11.4:1	4.4:1	11.7:1	49.8:1	6 ¹⁵ / ₃₂	164	6 x 7 ¹⁶ / ₁₆ FH	6 x 8 FH
B500.3TCR	1:1	2.7:1	11.4:1	3.9:1	10.4:1	44.5:1	6 ¹⁵ / ₃₂	164	6 x 7 ¹⁶ / ₁₆ FH	6 x 8 FH
B530TCR	1:1	3.1:1	12:1	3.9:1	12.1:1	47:1	7 ³ / ₃₂	180	6 x 7 ¹⁶ / ₁₆ HH	6 x 8 HH
B55.2STR	4.6:1	16.3:1	—	15.7:1	55.6:1	—	8 ²⁹ / ₃₂	226	6 x 7 ¹⁶ / ₁₆ FH	6 x 8 FH
B55.2STAC	4.6:1	16.3:1	—	15.7:1	55.6:1	—	8 ²⁹ / ₃₂	226	6 x 7 ¹⁶ / ₁₆ FH	6 x 8 FH
B55.3STR	1:1	4.6:1	16.3:1	3.4:1	15.7:1	55.6:1	8 ²⁹ / ₃₂	226	6 x 7 ¹⁶ / ₁₆ FH	6 x 8 FH
B55.3TCR	1:1	4.6:1	16.3:1	3.4:1	15.7:1	55.6:1	8 ²⁹ / ₃₂	226	6 x 7 ¹⁶ / ₁₆ FH	6 x 8 FH
B65.2STR	4.6:1	19.2:1	—	15.7:1	65.5:1	—	8 ²⁹ / ₃₂	226	6 x 7 ¹⁶ / ₁₆ FH	6 x 8 FH
B65.2STAC	4.6:1	19.2:1	—	15.7:1	65.5:1	—	8 ²⁹ / ₃₂	226	6 x 7 ¹⁶ / ₁₆ FH	6 x 8 FH
B65.3STR	1:1	4.6:1	19.2:1	3.4:1	15.7:1	65.5:1	8 ²⁹ / ₃₂	226	6 x 7 ¹⁶ / ₁₆ FH	6 x 8 FH
B65.3TCR	1:1	4.6:1	19.2:1	3.4:1	15.7:1	65.5:1	8 ²⁹ / ₃₂	226	6 x 7 ¹⁶ / ₁₆ FH	6 x 8 FH
B990.3STR	1:1	9.9:1	40:1	2.5:1	24.8:1	100:1	12	305	8 x 7 ¹⁶ / ₁₆ FH	8 x 8 FH
B990.3STAC	1:1	9.9:1	40:1	2.5:1	24.8:1	100:1	12	305	8 x 7 ¹⁶ / ₁₆ FH	8 x 8 FH
B990.3TCR	1:1	9.9:1	32:1	2.5:1	24.8:1	80:1	12	305	8 x 7 ¹⁶ / ₁₆ FH	8 x 8 FH

Part No.	Drum (D)		Base (B)		Height (H)		Weight		Line Ø		Line entry height (LE)			
	in	mm	in	mm	in	mm	lb	kg	Min	Max	in	mm		
B45.2STR	3 ³ / ₈	92	6 ¹ / ₁₆	170	7 ¹³ / ₁₆	199	10.7	4.85	1/4	6	7 ¹⁶ / ₁₆	14	3 ³ / ₈	92
B480TCR	4 ³ / ₄	120	7 ¹³ / ₃₂	188	8 ³ / ₁₆	208	17.4	7.9	—	—	—	—	3 ³ / ₈	92
B50.2STR†	4 ⁹ / ₁₆	116	7 ¹ / ₄	184	6 ³ / ₈	168	11.7	5.3	3/16	8	7 ¹⁶ / ₁₆	14	2 ⁹ / ₁₆	65
B50.3STR	4 ⁹ / ₁₆	116	7 ¹ / ₄	184	6 ⁷ / ₈	175	14.1	6.4	5/16	8	7 ¹⁶ / ₁₆	14	2 ⁹ / ₁₆	65
B500.3TCR	5 ¹ / ₈	130	7 ¹ / ₄	184	6 ¹ / ₈	175	14.6	6.6	5/16	8	7 ¹⁶ / ₁₆	14	2 ⁹ / ₃₂	55
B530TCR	5 ¹ / ₈	130	8 ⁹ / ₁₆	218	9 ⁹ / ₁₆	243	23.8	10.8	—	—	—	—	4 ³ / ₈	111
B55.2STR**	5 ¹ / ₈	149	10	255	7 ¹³ / ₁₆	199	20.9	9.5	5/16	8	5/8	16	3 ¹ / ₄	83
B55.2STAC	5 ¹ / ₈	149	10 ¹ / ₃₂	255	7 ¹³ / ₁₆	199	—	—	3/16	8	5/8	16	3 ¹¹ / ₃₂	85
B55.3STR**	5 ¹ / ₈	149	10	255	8 ²⁹ / ₃₂	226	26	11.8	5/16	8	5/8	16	3 ¹ / ₄	83
B55.3TCR	5 ¹ / ₈	149	10 ¹ / ₃₂	255	8 ²⁹ / ₃₂	226	25.4	11.5	—	—	—	—	3 ¹ / ₄	83
B65.2STR**	5 ¹ / ₈	149	10	255	7 ¹³ / ₁₆	199	20.9	9.5	3/16	8	5/8	16	3 ¹ / ₄	83
B65.2STAC	5 ¹ / ₈	149	10 ¹ / ₃₂	255	7 ¹³ / ₁₆	199	—	—	5/16	8	5/8	16	3 ¹¹ / ₃₂	85
B65.3STR**	5 ¹ / ₈	149	10	255	8 ²⁹ / ₃₂	226	26	11.8	5/16	8	5/8	16	3 ¹ / ₄	83
B65.3TCR	5 ¹ / ₈	149	10 ¹ / ₃₂	255	8 ²⁹ / ₃₂	226	25.4	11.5	—	—	—	—	3 ¹ / ₄	83
B990.3STR	8	203	10 ⁹ / ₁₆	274	9 ¹ / ₂	241	44.8	20.3	7/16	11	3/4	19	3 ²⁷ / ₃₂	98
B990.3STAC	8	203	12 ³ / ₈	314	9 ⁷ / ₁₆	240	—	—	7/16	11	3/4	19	3 ²⁷ / ₃₂	98
B990.3TCR	8	203	10 ⁹ / ₁₆	274	9 ¹ / ₁₆	240	41.5	18.8	—	—	—	—	3 ²⁷ / ₃₂	98

†Available in electric **Available in electric or hydraulic